




KPA EtherCAT PCI Board allows working with a PC as with an EtherCAT slave.

1 System requirements

- x86-compatible PC with a free 2.1 specs compliant PCI slot

2 Layout

- Connection of the slave in the network is carried out via In and Out connectors.
- Rotary switches (AddrH and AddrL) are used to set fixed address for the slave instead of auto-incremented by the master.
- Mode LED indicates that the slave is on and operating properly.

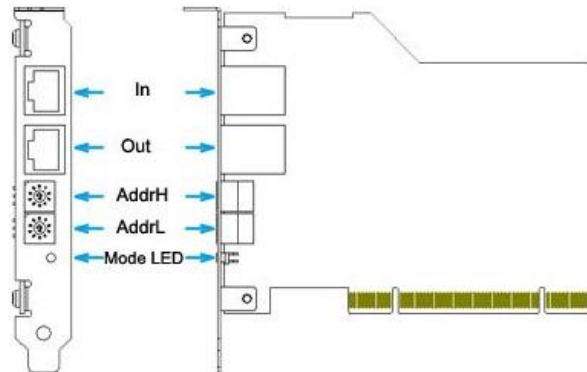

3 Technical data

Unit	PCI board
PC interrupt	Controlled by operating system
Physical interface	Ethernet
Connector type	RJ-45 x 2
Transfer rate	100 Mbit/s
PC interface	PCI specification V2.1 compliant
Power supply	+5V (+5%); typ. 700mA
Ambient conditions	<ul style="list-style-type: none"> • Operating temperature: 0°C to 70°C • Storage temperature: -20°C to 80°C • - Humidity < 90% (non-condensing)
EtherCAT specifications	<ul style="list-style-type: none"> • 256 Kbit EEPROM • 8 Kbyte I/O process data exchange • CoE (CANopen over EtherCAT) and EoE (Ethernet over EtherCAT) • 64 Bit Distributed clocks

4 Standards



This device meets the requirements of the EC directive 89/336/EWG "Electromagnetic Compatibility".
 Noise emission: EN55011:1998 (CISPR 11:1997)
 Noise immunity: EN61000-4-2:1995, EN61000-4-3:2002 (EN61000-4-3:1997)
 EN61000-4-4:2004 (EN61000-4-4:1995)
 EN61000-4-5:1995, EN61000-4-6:1996



Compliant with European Directive 2002/95/EC on the Restriction of Hazardous Substances (RoHS).

koenig-pa GmbH
 Im Talesgrund 9a
 91207 Lauf a.d. Pegnitz
 Germany
www.koenig-pa.de

Contact
 email: sales@koenig-pa.de
 tel.: +49 9128 725 614 (Feucht)
 tel.: +49 9128 725 631 (Feucht)
 fax: +49 9128 725 407 (Feucht)

koenig-pa GmbH Quality Management System certified according to DIN EN ISO 9001:2015 (Initial certification in 2008).
 Copyright © koenig-pa GmbH, Germany. All rights reserved.
 EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany

