


KPA EtherCAT PCI Board allows working with a PC as with an EtherCAT slave.

## 1 System requirements

- x86-compatible PC with a free 2.1 specs compliant PCI slot

## 2 Layout

- Connection of the slave in the network is carried out via In and Out connectors.
- Rotary switches (AddrH and AddrL) are used to set fixed address for the slave instead of auto-incremented by the master.
- Mode LED indicates that the slave is on and operating properly.

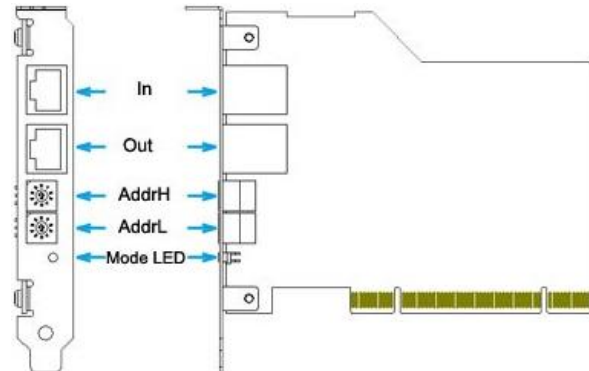

## 3 Technical data

Unit	PCI board
PC interrupt	Controlled by operating system
Physical interface	Ethernet
Connector type	RJ-45 x 2
Transfer rate	100 Mbit/s
PC interface	PCI specification V2.1 compliant
Power supply	+5V (+5%); typ. 700mA
Ambient conditions	<ul style="list-style-type: none"> <li>• Operating temperature: 0°C to 70°C</li> <li>• Storage temperature: -20°C to 80°C</li> <li>• - Humidity &lt; 90% (non-condensing)</li> </ul>
EtherCAT specifications	<ul style="list-style-type: none"> <li>• 256 Kbit EEPROM</li> <li>• 8 Kbyte I/O process data exchange</li> <li>• CoE (CANopen over EtherCAT) and EoE (Ethernet over EtherCAT)</li> <li>• 64 Bit Distributed clocks</li> </ul>

## 4 Standards



This device meets the requirements of the EC directive 89/336/EWG "Electromagnetic Compatibility".

Noise emission: EN55011:1998 (CISPR 11:1997)

Noise immunity: EN61000-4-2:1995, EN61000-4-3:2002 (EN61000-4-3:1997)

EN61000-4-4:2004 (EN61000-4-4:1995)

EN61000-4-5:1995, EN61000-4-6:1996



Compliant with European Directive 2002/95/EC on the Restriction of Hazardous Substances (RoHS).

**koenig-pa GmbH**  
 Im Talesgrund 9a  
 91207 Lauf a.d. Pegnitz  
 Germany  
[www.koenig-pa.de](http://www.koenig-pa.de)

**Contact**  
 email: [sales@koenig-pa.de](mailto:sales@koenig-pa.de)  
 tel.: +49 151 74 147 001  
 tel.: +49 9128 725 631  
 tel.: +49 9123 960 5796

koenig-pa GmbH Quality Management System  
 certified according to DIN EN ISO 9001:2015  
 Initial certification in 2008



Copyright © koenig-pa GmbH, Germany. All rights reserved.  
 EtherCAT® is registered trademark and patented technology,  
 licensed by Beckhoff Automation GmbH, Germany